



- High Performance Microwave Switches
- SPDT & SP6T Relays With Bandwidth of 18 GHz
- 7 Banks of SPDT & 5 Banks of SP6T Switches
- SP6T - Unused Signals Terminated into 50 Ω
- Excellent RF & Repeatability Characteristics

- LED Indication
- Compact 2U Form Factor
- LXI Standard 1.4 Compliant
- I/O & Direct I/O Drivers
- 3 Year Warranty

The 60-890-001 Microwave Switching Unit has a mixed configuration of terminated SP6T and unterminated SPDT relays. It is suitable for switching 50 Ω signals up to 18 GHz, connection is by front panel mounted SMA connectors.

The switch has an extremely high level of performance with low VSWR, very high isolation, low loss and high power handling. It is ideal for switching HF to microwave frequencies.


The 60-890-001 occupies 2 U of rack space, providing a compact microwave switching solution. The switches can be used individually or interconnected to create a complex switching system.

Controlling the Switch

The 60-890-001 is controlled through an LXI interface based on Ethernet 1000Base-T connectivity. This provides a quick and easy method of installation and a simple way of controlling the unit at a remote location through its API or built in soft front panel. The ability for control at a distance aids system testing without the need for a physical presence.

Other Microwave Switching Configurations

We are able to offer other microwave switching solutions, if you have a custom requirement for switching please contact your local Pickering Interfaces sales representative.

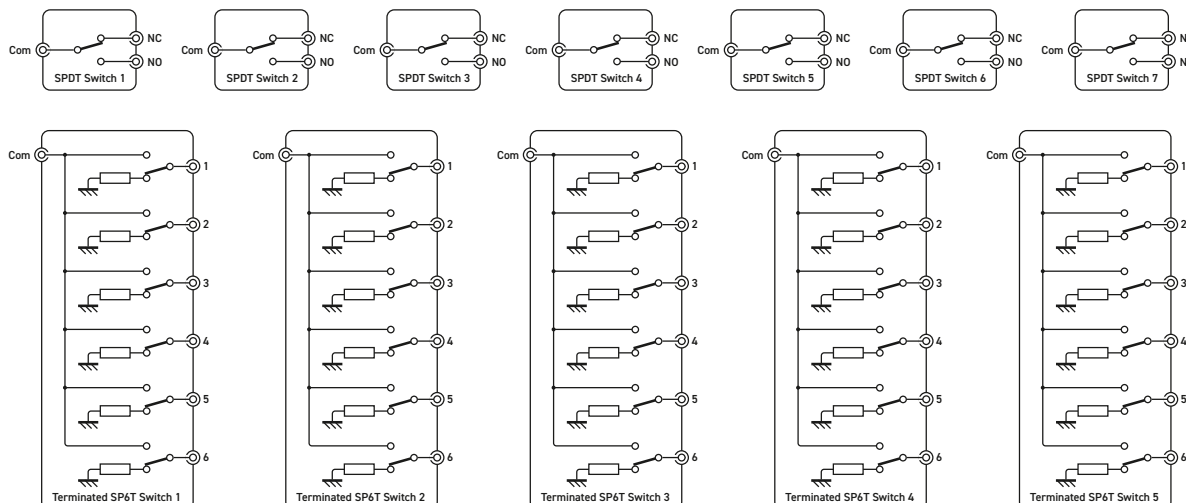

Schematic Diagram for the 60-890-001 Microwave Switch - 7xSPDT & 5xSP6T Terminated


General Specification - Terminated SP6T Switch

Configuration:	SP6T Microwave Multiplexer with terminated unused inputs
Indicators:	LEDs to indicate a closed RF path
Connectors:	SMA
Operate Time:	Typically 15 ms
Maximum Cold Switch Voltage:	100 V*
Maximum Carry Current:	1 A
Expected Life (Low Power)	>2 million operations


* For full voltage rating, signal sources to be switched must be fully isolated from mains supply and safety earth.

RF Specification - SP6T Terminated Switch


Characteristic Impedance:	50 Ω
Bandwidth	DC to 18 GHz
Isolation:	80 dB (0-3 GHz) 70 dB (3-8 GHz) 60 dB (8-12.4 GHz) 60 dB (12.4-18 GHz)
Insertion Loss:	0.2 dB (0-3 GHz) 0.3 dB (3-8 GHz) 0.4 dB (8-12.4 GHz) 0.5 dB (12.4-18 GHz)
VSWR:	1.2:1 (0-3 GHz) 1.3:1 (3-8 GHz) 1.4:1 (8-12.4 GHz) 1.5:1 (12.4-18 GHz)
Maximum RF Carry Power:	240 W (0-3 GHz) 150 W (3-8 GHz) 120 W (8-12.4 GHz) 100 W (12.4-18 GHz)
Termination Power Rating:	1W per termination, 3 W total per 6 channel switch

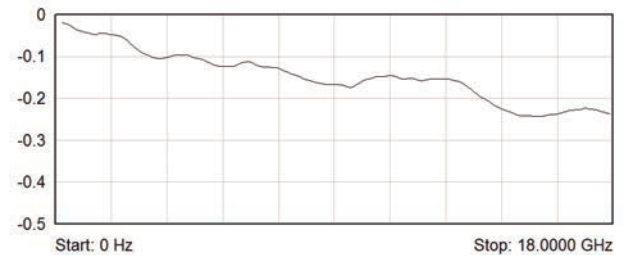

Typical Insertion Loss (dB) Plot for Terminated SP6T Switch

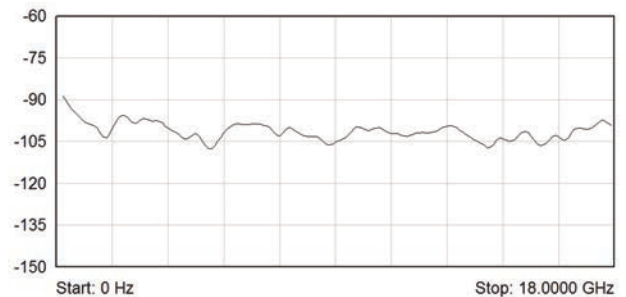

Typical Isolation (dB) Plot for Terminated SP6T Switch

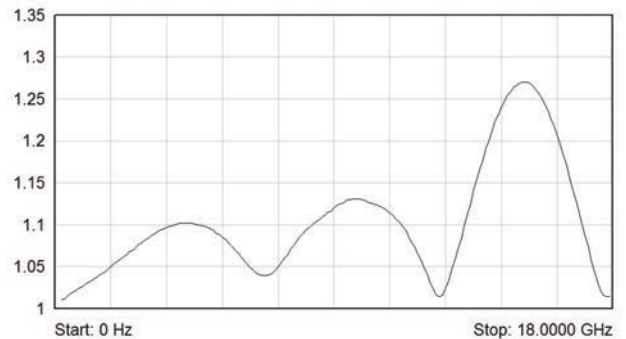


Typical VSWR Plot for Terminated SP6T Switch

General Specification - Unterminated SPDT Switch


Configuration:	SPDT Microwave Switch
Indicators:	LED indicates activated relay
Connectors:	SMA
Operate Time:	10 ms
Expected Life:	>10 million operations

RF Specification - Unterminated SPDT Switch


Characteristic Impedance:	50 Ω
Maximum Frequency:	18 GHz
Insertion Loss:	<0.2 dB to 3 GHz <0.3 dB to 8 GHz <0.4 dB to 12.4 GHz <0.5 dB to 18 GHz
Isolation:	>80 dB to 3 GHz >70 dB to 8 GHz >60 dB to 18 GHz
VSWR:	<1.2:1 0 to 3 GHz <1.3:1 to 8 GHz <1.4:1 to 12.4 GHz <1.5:1 to 18 GHz
RF Average Carry Power at 25 °C:	240 W to 3 GHz 150 W to 8 GHz 120 W to 12.4 GHz 100 W to 18 GHz

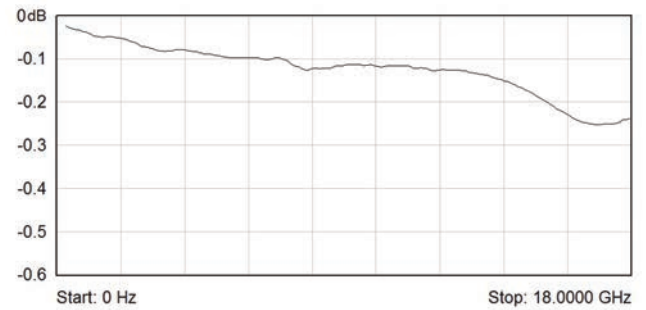

Typical Insertion Loss (dB) Plot for Unterminated SPDT Switch

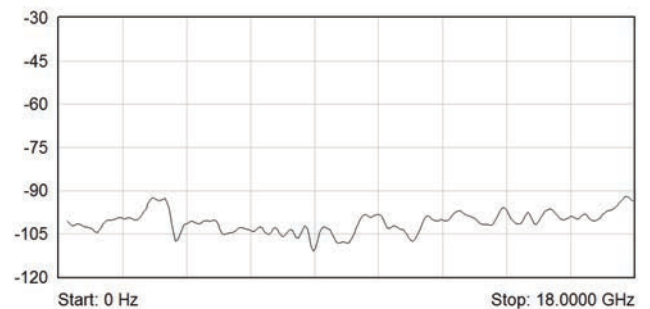

Typical Isolation (dB) Plot for Unterminated SPDT Switch

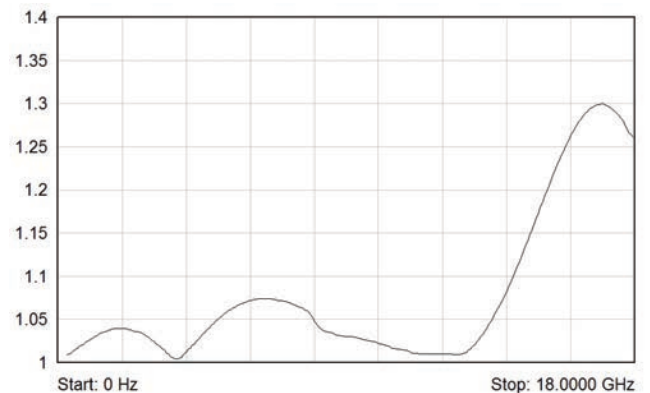

Typical VSWR Plot for Unterminated SPDT Switch

Power Source

Universal AC mains supply, 90-120/200-240 V 50-60 Hz	
Power Inlet:	Male IEC connector
Power Rating:	100 VA maximum
Fuse Rating:	5 A, 250 V

LAN Interface

Compliant to LXI Standard 1.4, the 60-890-001 has a 1000Base-T Ethernet Interface via a standard RJ-45 connector mounted on the rear panel with an LCD display showing the unit's IP address.

LXI Status Indicators

Front panel mounted LEDs:

- Power
- Ready
- Error
- LAN
- Active

Mechanical Characteristics

Supplied with front panel ears to enable rack mounting on a shelf or other rear support mechanism.

Dimensions: Full 19" rack width, 500 mm depth, 2U high.

3D models for all versions in a variety of popular file formats are available on request.

Connectors

Signals via front panel SMA connectors.

Cooling

Fan assisted cooling, side air intakes and rear exhaust.

Safety & CE Compliance

All products are fully CE compliant and meet applicable EU directives:

Low-voltage safety EN61010-1:2010,

EMC Immunity EN61326-1:2013,

Emissions EN55011:2009+A1:2010.

Operating/Storage Conditions

Operating Temperature:	0 °C to +55 °C
Humidity:	Up to 90% non-condensing
Altitude:	5000 m
Storage/Transport Temperature:	-20 °C to +75 °C
Humidity:	Up to 90% non-condensing
Altitude:	15000 m

Product Order Codes

LXI Microwave Switching Unit:	
5x Terminated SP6T 50 Ω 18 GHz,	
7x Unterminated SPDT 50 Ω 18 GHz	60-890-001

Versions with other bank counts and different frequency ranges can be made to order, please contact sales office.

Product Customization

Pickering LXI units are designed and manufactured on our own flexible manufacturing lines, giving complete product control and enabling simple customization to meet very specific requirements.

Customization can include:

- Alternative switch types
- Mixture of switch types
- Alternative number of switches
- Different performance specifications

All customized products are given a unique part number, fully documented and may be ordered at any time in the future.

Please contact your local sales office to discuss.

Mating Connectors & Cabling

For connection accessories for the 60-890-001 please refer to the [90-011D](#) RF Cable Assemblies data sheet where a complete list and documentation can be found for accessories, or refer to our website.

Further LXI RF Switching Solutions from Pickering



60-891 LXI 36:1 Microwave MUX. Available With SMA Connectors (18 GHz) or BNC Connectors (4 GHz).



60-750/751 LXI Microwave Matrix. Bandwidth up to 20 GHz and is available in sizes from Single 3x3 up to Dual 4x4 with Loop-Thru and termination options.



60-801/802 LXI Microwave MUX, up to 40GHz and support for up to 16 banks of 6 or 4 way multiplexers.

Connectivity Solutions

We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with 1200+ products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules. These accessories are detailed in Connector Accessories data sheets, where a complete list and documentation can be found for each accessory.



Connectors & Backshells



Multi-way Cable Assemblies



RF Cable Assemblies




Breakouts



Connector Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications.

- Fully supported on modern browsers and tablet operating systems.
- Built-in tutorials and videos allow you to get quickly up to speed.
- Store cable assemblies in the Cloud and develop over time.
- Each cable design has a downloadable PDF documentation file detailing all specifications

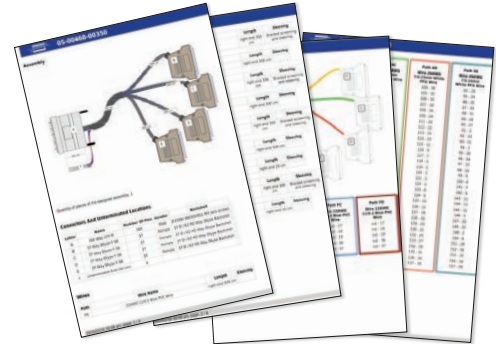

Start designing your custom cabling, go to pickeringtest.com/cdt


Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for PXI/LXI based test systems. Our modules are fully supported by Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our Relay Division. These instrument grade reed relays feature **SoftCenter™** technology, ensuring long service life and repeatable contact performance.

To learn more go to pickeringrelay.com

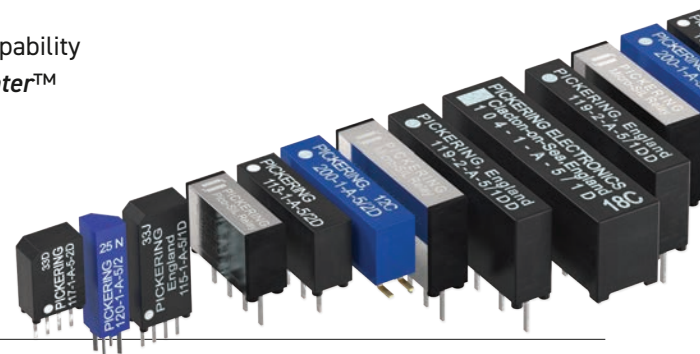

Programming

Pickering provide kernel, IVI and VISA (NI & Keysight) drivers which are compatible with all Microsoft supported versions of Windows and popular older versions.

For more information go to pickeringtest.com/os

The VISA driver support is provided for LabVIEW Real Time Operating Systems (Pharlap and Linux-RT). For other RTOS support contact Pickering. These drivers may be used with a variety of programming environments and applications including:

- **Pickering Interfaces Switch Path Manager**
- **National Instruments products** (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio products** (Visual Basic, Visual C++)
- **Programming Languages** C, C++, C#, Python
- **Keysight VEE and OpenTAP**
- **Mathworks MATLAB, Simulink**
- **Marvin ATEasy**
- **MTQ Testsolutions Tecap Test & Measurement Suite**


Drivers for popular Linux distributions are available, other environments are also supported, please contact Pickering with specific enquiries. We provide Soft Front Panels (SFPs) for our products for familiarity and manual control, as well as comprehensive documentation and example programs to help you develop test routines with ease.

To learn more about software drivers and development environments go to pickeringtest.com/software

Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development.

To learn more go to pickeringtest.com/spm

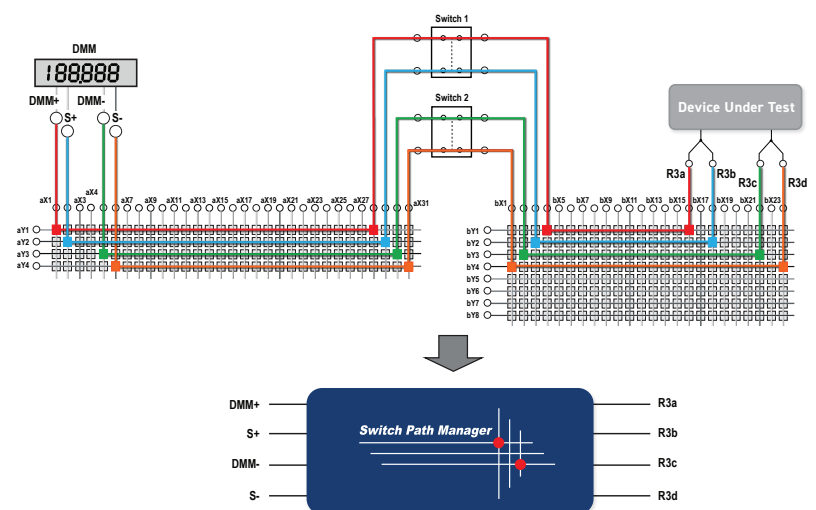

Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more go to pickeringtest.com/ebirst



Three Year Warranty & Guaranteed Long-Term Support

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available with various levels for your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years.

To learn more go to pickeringtest.com/support

Available Product Resources

We have a library of resources including success stories, product and support videos, articles and white papers as well as application-specific brochures to assist you. We have also published reference books on switching technology and the PXI and LXI standards.

To view, download or request any of our product resources go to pickeringtest.com/resources

